

3A, 60V Low Forward Voltage Schottky Rectifier**FEATURES**

- Planar MOS controlled diode
- Low forward voltage drop
- Low profile - max body height 0.9 mm
- Moisture sensitivity: level 1, per J-STD-020
- High temperature soldering guaranteed: 260°C/10 seconds
- RoHS compliant
- Halogen-free according to IEC 61249-2-21 definition

SOD-123HSRoHS
COMPLIANTHALOGEN
FREE**MECHANICAL DATA**

- Case: SOD-123HS
- Case material: molding compound meets UL 94V-0 flammability rating
- Polarity: color band denotes cathode end

TYPICAL APPLICATION

For use of fast switching in RF module, lighting, cellular phone, portable device, power supplies and other consumer applications.

MAXIMUM RATINGS

$T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Value		Unit
Repetitive Peak Reverse Voltage	V_{RRM}	60		V
Average Forward Rectified Current	$I_{F(AV)}$	3		A
Peak Forward Surge Current (8.3 ms single half sine-wave superimposed on rated load)	I_{FSM}	80		A
Operating Junction Temperature Range	T_J	-55 to +150		°C
Storage Temperature Range	T_{STG}	-55 to +150		°C

ELECTRICAL CHARACTERISTICS

$T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Test Conditions	Symbol	Value		Unit
			Typ.	Max.	
Forward Voltage@ $I_F=3\text{A}$	$T_A=25^\circ\text{C}$	V_F	0.46	0.5	V
	$T_A=125^\circ\text{C}$		0.4	0.44	
Reverse Current @ V_{RRM}	$T_A=25^\circ\text{C}$	I_R	32	80	uA
	$T_A=125^\circ\text{C}$		25	60	
Typical Thermal Resistance		$R_{\theta JA}$	250		°C/W

3A, 60V Low Forward Voltage Schottky Rectifier

RATINGS AND CHARACTERISTIC CURVES

$T_A=25^\circ\text{C}$ unless otherwise noted

FIG.1: Forward Output Current Derating Curve

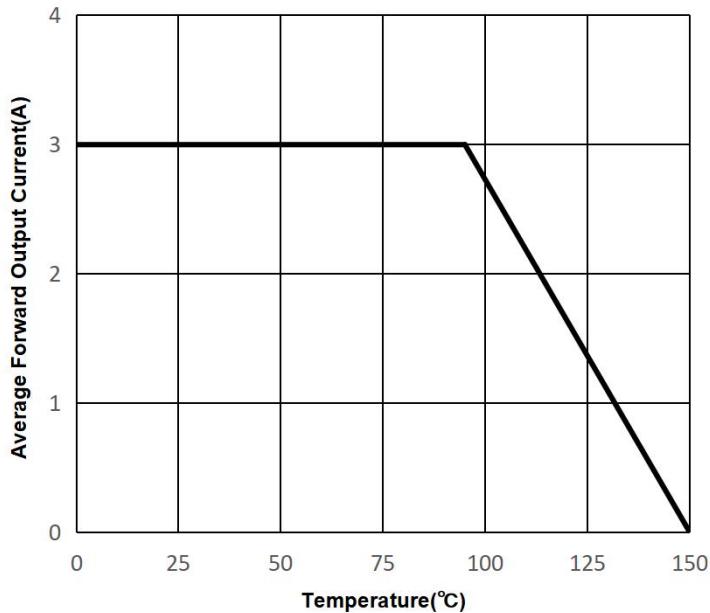


FIG.2: Maximum Non-Repetitive Peak Forward Surge Current

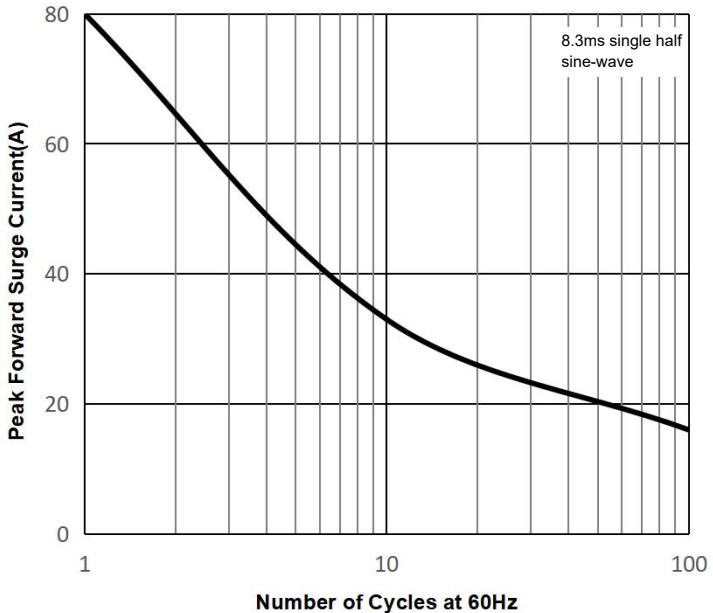


FIG.3: Typical Forward Characteristics


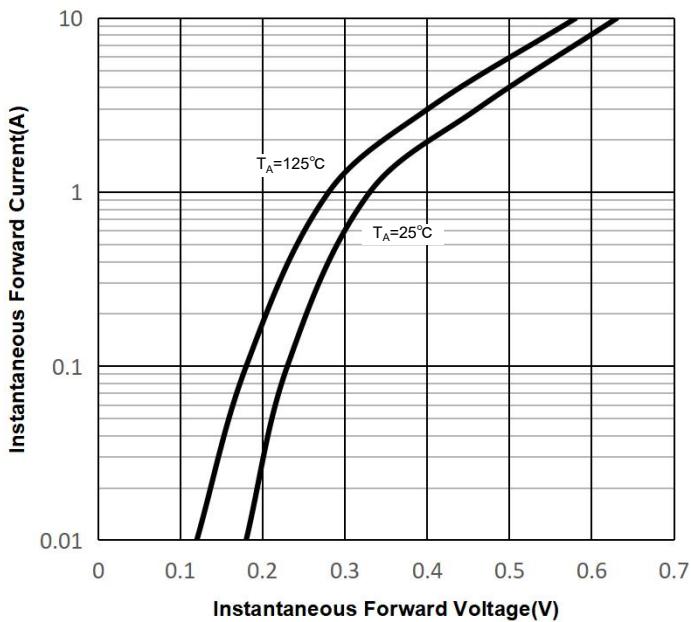


FIG.4: Typical Reverse Characteristics

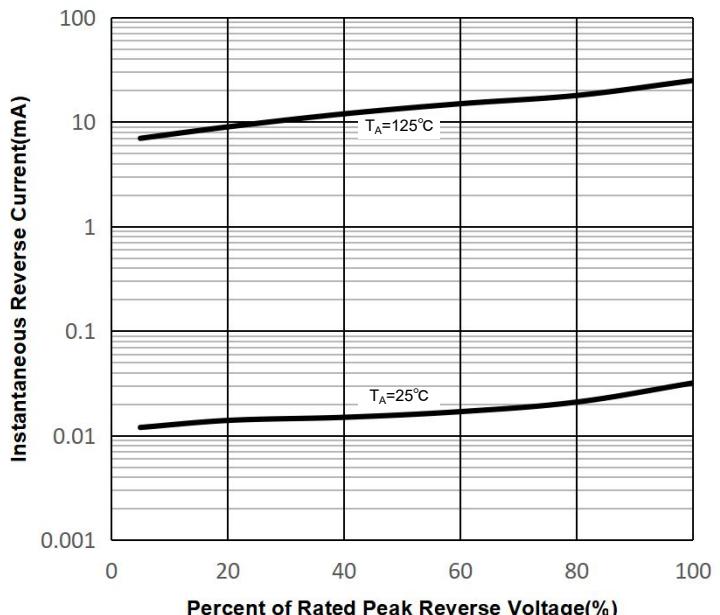

3A, 60V Low Forward Voltage Schottky Rectifier

PACKAGE OUTLINE DIMENSIONS

Package	SOD-123HS	
Unit:mm	MIN	MAX
A	0.75	0.90
B	0.85	1.05
B1	0.85	1.05
C	0.1	0.25
D	1.9	2.1
E	2.9	3.1
L1	2.0	2.45
L2	0.4	0.85
L3	1.3	1.7
HE	3.5	3.9

PACKING INFORMATION

Package	Reel(PCS)	Inner Box(PCS)	Carton(PCS)
SOD-123HS	3,000	30,000	120,000