

Single Phase Glass Passivated Bridge Rectifiers

FEATURES

- Glass passivated chip junction
- High surge current capability
- Low reverse leakage current
- High temperature soldering guaranteed: 270°C±5°C/10 seconds
- RoHS compliant

MECHANICAL DATA

- Case: GBUHS
- Case material: molding compound meets UL 94V-0 flammability rating
- Polarity: as marked on case

TYPICAL APPLICATION

General purpose use in Household electric appliances, industrial power supply, switching mode power supply, general purpose single phase bridge rectifier, etc.

MAXIMUM RATINGS

T_A=25°C unless otherwise noted


Parameter	Symbol	GBU 2506HS	GBU 2508HS	GBU 2510HS	Unit
Repetitive Peak Reverse Voltage	V _{RRM}	600	800	1000	V
Average Forward Rectified Current (With heatsink, T _C =100°C)	I _{F(AV)}	25			A
Peak Forward Surge Current (8.3ms single half sine-wave superimposed on rated load)	I _{FSM}	300			A
Rating for Fusing (1ms<t<8.3ms, T _J =25°C, Rating of per diode)	I ² t	373			A ² s
Operating Junction Temperature Range	T _J	-55 to +150			°C
Storage Temperature Range	T _{STG}	-55 to +150			°C

ELECTRICAL CHARACTERISTICS

T_A=25°C unless otherwise noted


Parameter	Test Conditions	Symbol	Value	Unit
Peak Forward Voltage@I _F =12.5A (Pulse measurement, Rate of per diode)		V _F	1.1	V
Reverse Current@V _R =V _{RRM} (Pulse measurement, Rate of per diode)	T _J =25°C	I _R	5	μA
	T _J =125°C		500	
Typical Thermal Resistance	without heatsink	R _{θJA}	22	°C/W
	with heatsink	R _{θJC}	0.78	

GBUHS

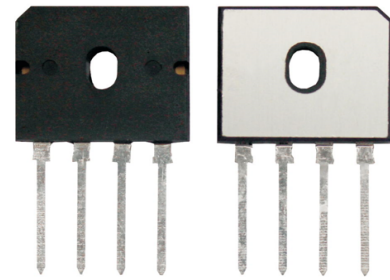

RoHS
COMPLIANT

HALOGEN
FREE
AVAILABLE



Single Phase Glass Passivated Bridge Rectifiers

RATINGS AND CHARACTERISTICS CURVES

FIG.1 Derating Curve For Output Rectified Current

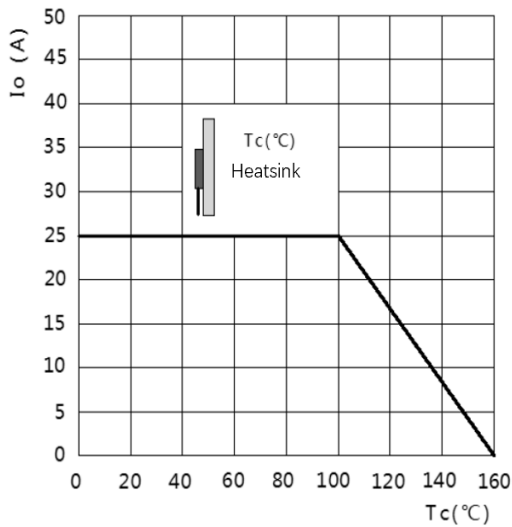


FIG.2 Maximum Non-Repetitive Peak Forward Surge Current

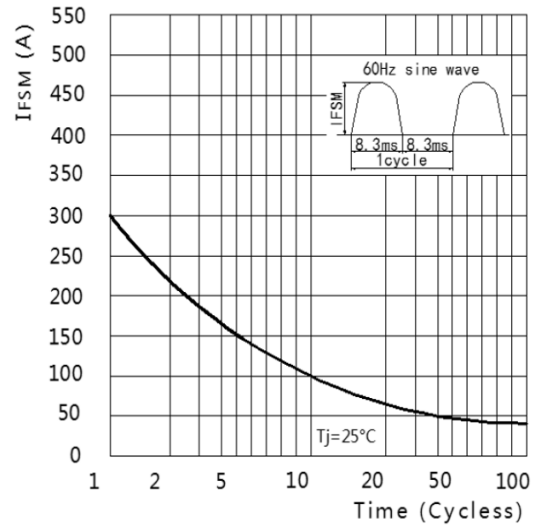


FIG.3 Typical Reverse Characteristics


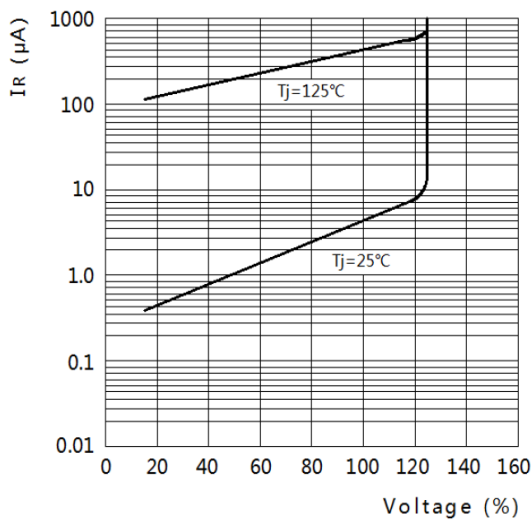


FIG.4 Typical Forward Characteristics

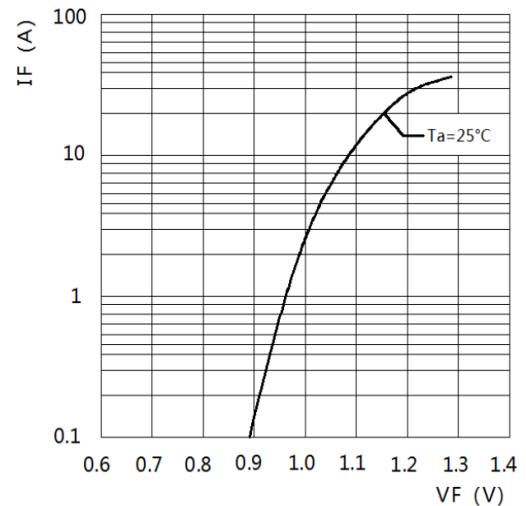


GBU2506HS THRU GBU2510HS

25A, 600V to 1000V

Single Phase Glass Passivated Bridge Rectifiers

PACKAGE OUTLINE DIMENSIONS

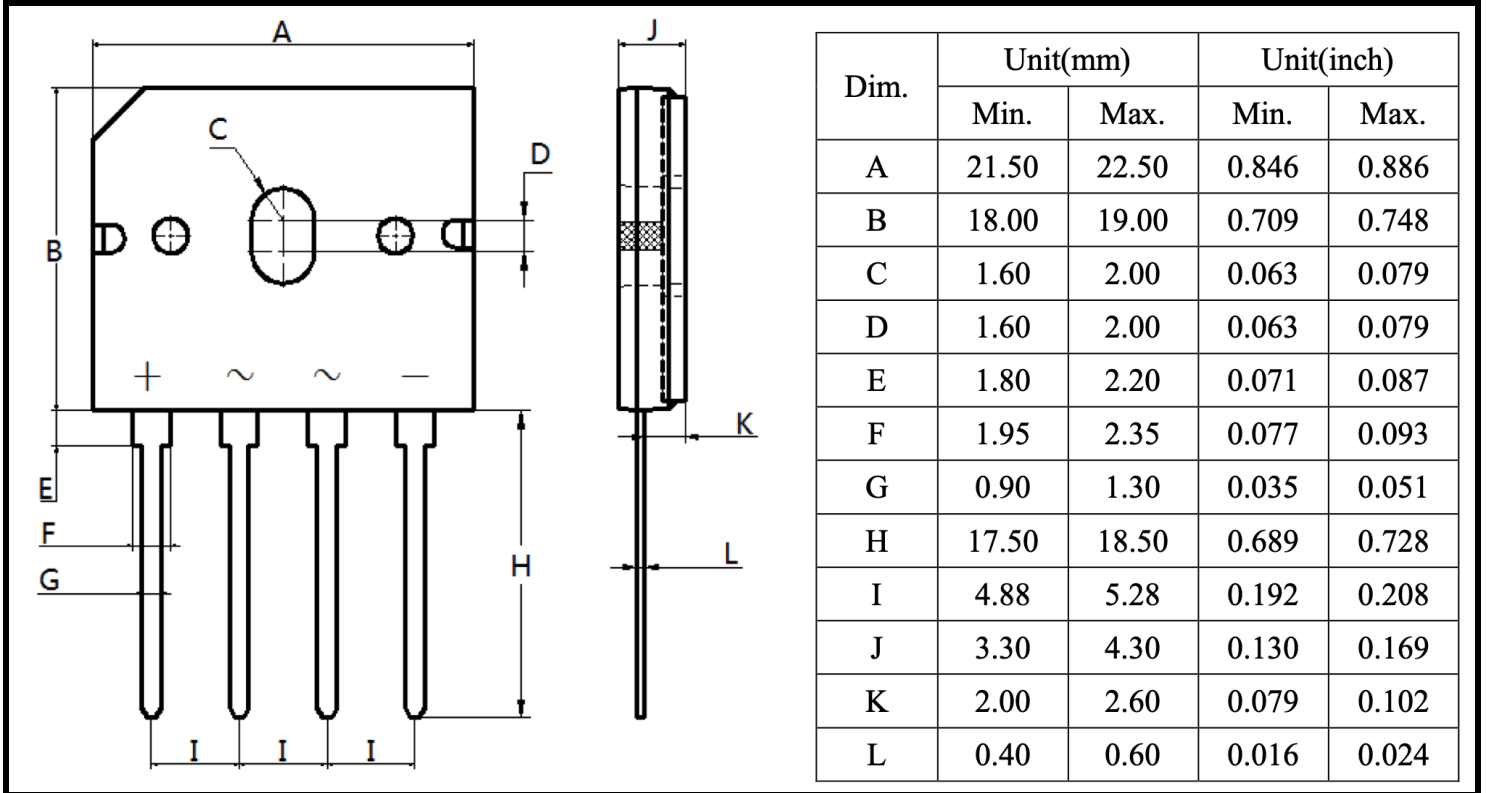

PACKING INFORMATION

Package	Inner Box (PCS)	Carton (PCS)
GBUHS	250	3,000